


21.10%

Maximum Module Efficiency

Ideal for **Utility** & **Commercial** Installations

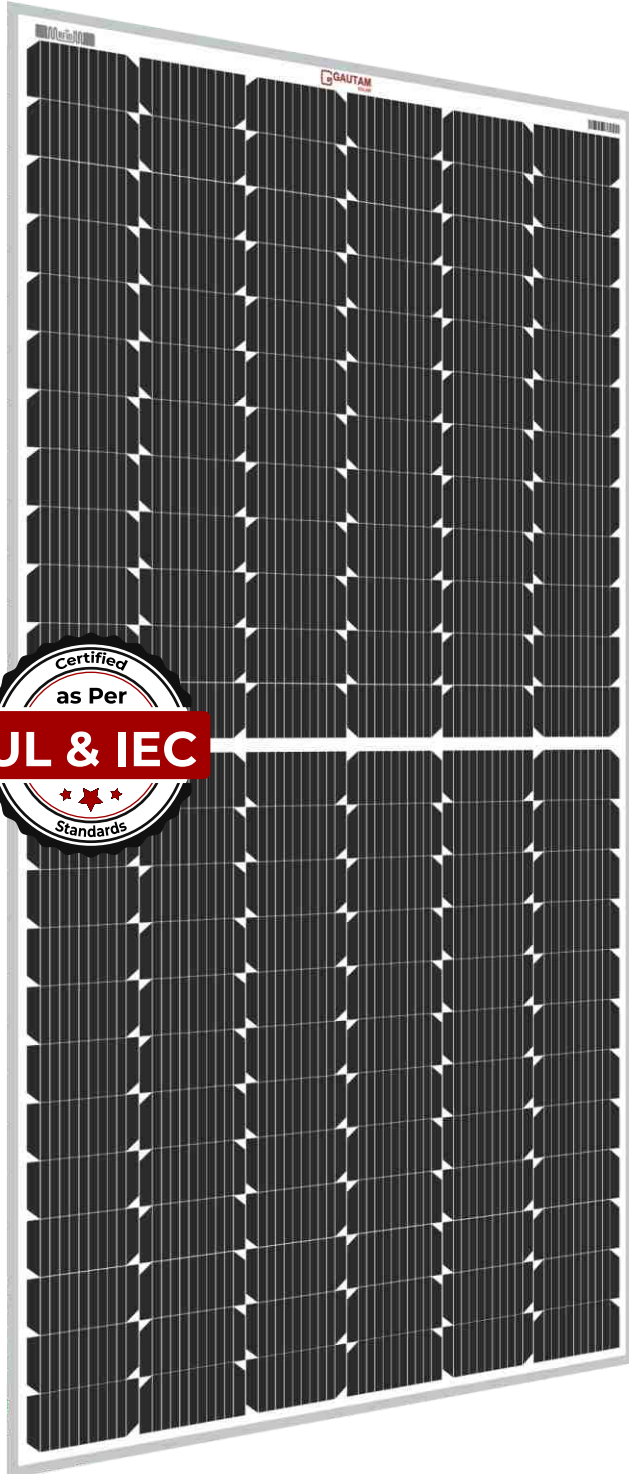

No. 1 DCR Module Supplier

THE BUSINESS LINE **businessline.**

Companies

Gautam Solar sells 100 MW modules under domestic content requirement





The Delhi-based solar module manufacturer has four factories in Haridwar

Gautam Solar said on Wednesday that it has sold 100 megawatts (MW) solar modules under the domestic content requirement (DCR) category, which are majorly used by solar EPC and system integrators.

Gautam Solar said on Wednesday that it has sold 100 megawatts (MW) solar modules under the domestic content requirement (DCR) category, which are majorly used by solar EPC and system integrators.

gigawatt (GW) production and provides a wide range of indigenously manufactured solar modules all over the country," it said in a statement.

Excellent Anti-PID Performance

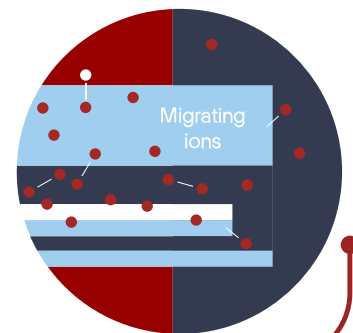

ELECTRICAL DATA (STC)

Model No.	G2X1590-UHAD	G2X1605-UHAD	G2X1620-UHAD	G2X1635-UHAD
Peak Power Output -Pmax(Wp)	530	535	540	545
Power Output Tolerance (Wp)	0 ~ +5	0 ~ +5	0 ~ +5	0 ~ +5
Open Circuit Voltage-Voc(V)	49.05	49.14	49.23	49.34
Maximum Power Voltage-Vmpp(V)	41.50	41.70	41.80	41.94
Short circuit current-Isc(A)	13.65	13.71	13.79	13.86
Maximum Power Current-Impp(A)	12.77	12.83	12.92	13.00
Module Efficiency (%)	20.52	20.71	20.90	21.10
Fill Factor (%)	79.16	79.41	79.54	79.70

*(STC) = 1000 W/m² Irradiance, Air Mass 1.5 and 25°C Cell Temperature

ELECTRICAL DATA (NOCT)

Peak Power Output -Pmax(Wp)	393.79	397.51	401.22	404.94
Open Circuit Current-Voc(V)	45.62	45.70	45.78	45.89
Maximum Power Voltage-Vmpp(V)	37.97	38.16	38.25	38.38
Short circuit current-Isc(A)	11.08	11.13	11.20	11.25
Maximum Power Current-Impp(A)	10.37	10.42	10.49	10.56



*(NOCT) = 800 W/ m² Irradiance, Air Mass 1.5, Ambient Temperature 20°C and Wind Speed 1 m/s

MECHANICAL DATA

Solar Cells Per Module (units)	144
Cells Configuration (Matrix)	12 × 6 12 × 6
Cell Size(mm)	91 × 182
Length(L) × Width(W) × Thickness(T) in mm	2278 × 1134 × 35
Area of module (sq-m)	2.583252
Weight of module(kg)	27.1 ± 2%

Cell Type	Mono-crystalline PERC (91 × 182)
Junction Box	IP 68 rated Split Junction Box with Individual Bypass Diode
Connector	IP 68 rated MC4 Compatible
Front Cover(Glass)	3.2 mm Low Iron High Transmission AR Coated Tempered Glass
Back Cover (Backsheet)	Poly Vinyl Fluoride (Composite Film)
Encapsulant	PID Free and UV Resistant
Frame	Anodized Aluminum Frame
Application Class Rating	Class A
Safety Class Rating	Class II
Fire Safety	Class C
Mechanical Load	Snow Load 5400 Pa, Wind Load 2400 Pa
Cable Type	4 mm ²

Characteristic Curves

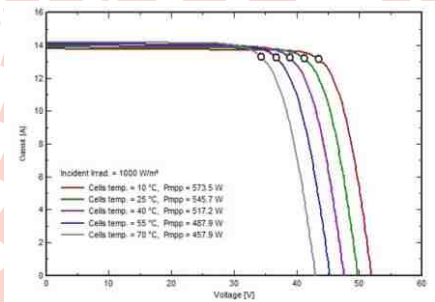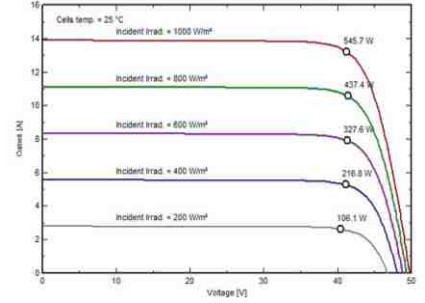

TEMPERATURE RATINGS

NOCT	45°C ± 2°C
Temperature Coefficient of Pmax	-0.39% /°C
Temperature Coefficient of Voc	-0.30% /°C
Temperature coefficient of Isc	0.06% /°C
Temperature Range	-40°C to +85°C


Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A

PACKING CONFIGURATION

Container	40' HQ
Pieces per Pallet	31
Pallets per container	20
Pieces per container	620

12 Years Product Warranty
25 Years Power Output Warranty

Engineering Drawings

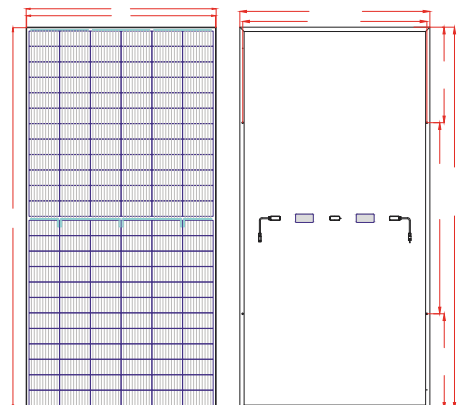

Specifications provided in the datasheet are subject to change without Prior notice.